



INDIA'S First and Foremost Liner
Made with PURE PHENOLIC RESIN



DECORATIVE LAMINATES

A Commitment To Excellence

www.durianlam.com



LONGER LIFE



IMPROVED
STRENGTH



HIGH SCRATCH
RESISTENCE



DECORATIVE LAMINATES

A JOURNEY

Home & Office
Furniture

Laminates

Veneer

Plywood & Doors


Turnkey Solution

THAT HAS BEEN INCREDIBLE

3.2 Million Customers

10,000+ Corporate Clients

INDIA'S First and Foremost Liner Made with PURE PHENOLIC RESIN

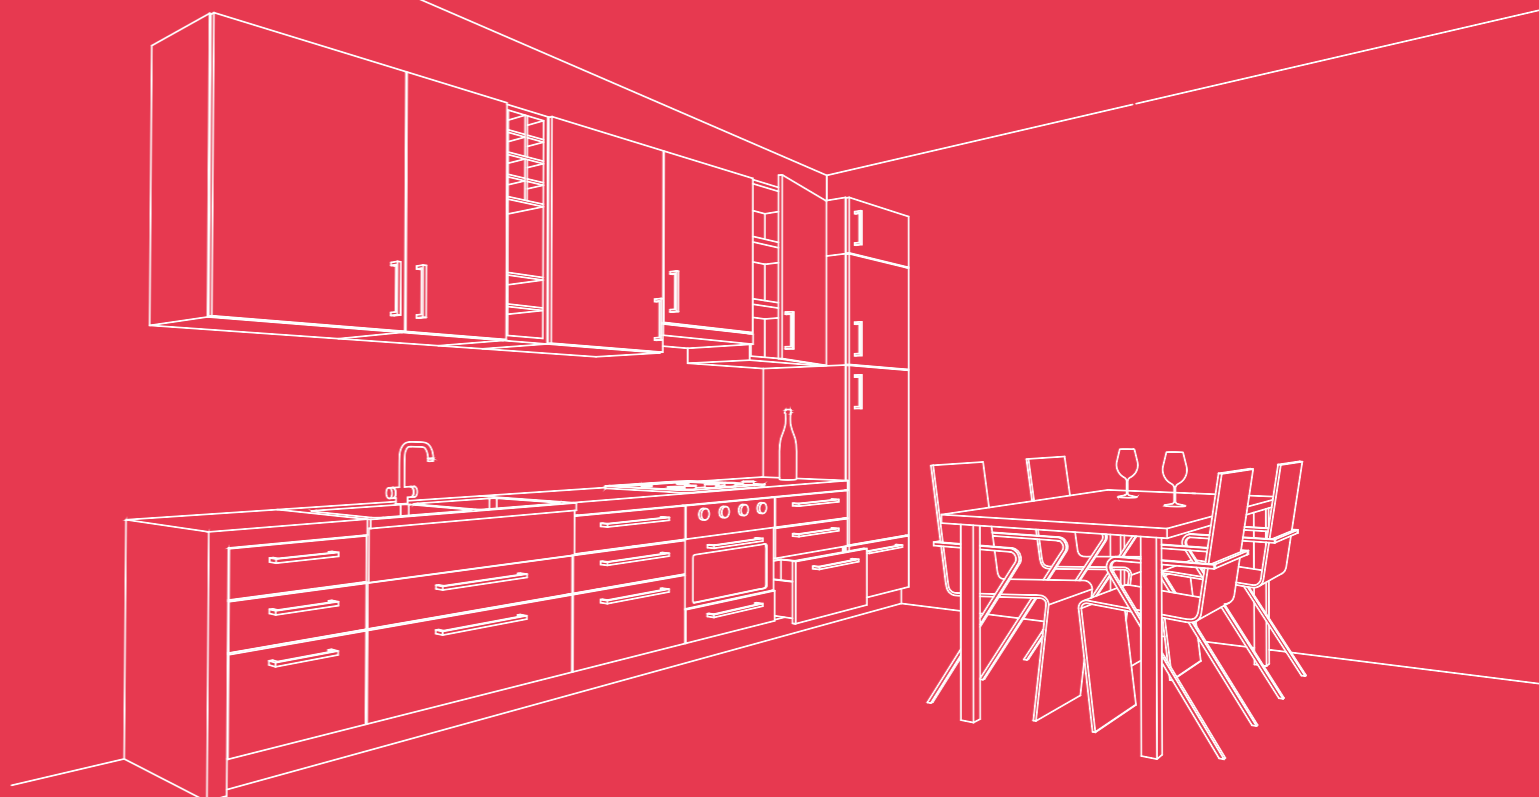



73987 STITCH LINEN




73994 LIGHT DOT FABRIC




73974 WHEAT FABRIC



73983 CREAM LINEN

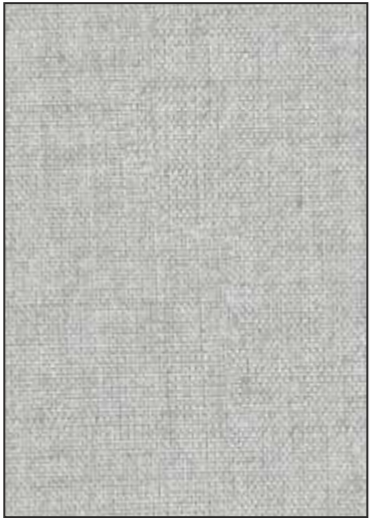

73991 FEB FABRIC

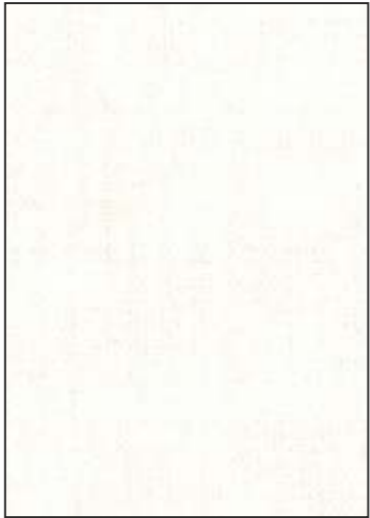

73975 BRIGHT FABRIC



73984 BEIGE LINEN



73972 PEARL FABRIC



73992 IVORY FABRIC



73981 ROYAL FABRIC



73956 CREAM FABRIC



73985 CALICO FABRIC



73958 GREY FABRIC



73960 BEIGE FABRIC



73986 JUTE FABRIC



73997 WHITE FABRIC



73995 LIGHT WOOLEN



73988 FINIX FABRIC



73208 HIGHLAND PINE



73242 BEECH BAVARIA



73202 TYROL PINE



72691 ROYAL WALNUT



79340 RAW ACASIA



79338 POLISHED WALNUT



72960 WHITE BEECH



72930 MANGFALL BEECH



73990 ANTIQUE PINE



72989 WALNUT FIBER



79339 POLISHED ACASIA



79336 REAL WALNUT



72020 KILIS WENGE



73921 FRENCH WALNUT



72990 WALNUT ZEN



79325 NATURAL OAK



79330 RED SANDAL WOOD




79337 NATURAL WALNUT


PREMIUM 80 GSM PAPER




71180 EGG WHITE



71463 SILVER GREY




71111 SF FROSTY WHITE



71111 MT FROSTY WHITE



71117 SF WHITE



71117 MT WHITE

All items available in 0.7/0.8/0.92 in Matt (MT) & Suede (SF) Finishes.



Durian

PROPERTIES	UNIT	SPECIFIED VALUE				DURIAN RESULT	
		IS:2046/95	BSEN438	DINEN438	ISO4586-1	VGS	HGS
Surface Wear Resistance	REV.	350	350	350	350	350 Min	500 Min
Boiling Water Resistance							
• Thickness Increase	%	12.0 Max	14.0 Max	14.0 Max	14.0 Max	8	7
• Weight Increase	%	14.0 Max	12.0 Max	12.0 Max	12.0 Max	7	6
• Appearance		Grade	4	4	4	4	5
Dimension Stability							
• MD (Machine Direction)	L-%	0.53 Max	0.625 Max	0.625 Max	0.625 Max	0.45	0.35
• CD (Cross Direction) T-%	T-%	1.01 Max	1.100 Max	1.100 Max	1.100 Max	0.65	0.55
Resistance to High Temperature & Cigarette Burns		Grade	3	3	3	3	4
Resistance to Steam	Grade	4	4	4	4	5	5
Resistance to Dry Head							
• Gloss	Grade	3	3	3	3	4	4
• Other		4	4	4	4	5	5
Resistance to Cracking	Grade	4	4	4	4	5	5
Resistance To Scratching	Newton	2.0	2.0	2.0	2.0	2.5	3.5
Small Diameter. Ball Resistance	Newton	20	20	20	20	25	28
Specific Gravity	gm/cm3	-	-	-	-	1.38 to 1.45	1.38 to 1.45
Resistance to Staining	Grade						
• Acetone		5	5	5	5	5	5
• Coffee		5	5	5	5	5	5
• Sodium Hydroxide 25% Solution		5	5	5	5	5	5
• Hydrogen Peroxide - 30%		4	4	4	4	5	5
• Shoe Polish		4	4	4	4	5	5
• Citric Acid-10 % solution		4	4	4	4	5	5
Resistance to Color Change in							
• Xenon Arc Light in Enclosed	Blue Wool	6 Min.	6 Min.	6 Min.	6 Min.	6 Min.	6 Min.
• Carbon Arc Light	Standard	5 Min.	5 Min.	5 Min.	N / A	5 Min.	5 Min.

Grade : 5-Highest, 1-Lowest, VGS - Vertical Grade Standard, HGS : Horizontal Grade Standard
CONVECTIONAL COLD PRESS GRADE LAMINATE FOR INTERIOR APPLICATION.



DECORATIVE LAMINATES

A Commitment To Excellence
www.durianlam.com

Ask For



An ISO 9001 : 2015, ISO 14001 : 2015

CEDAR DECOR PVT. LTD

A-1 / 1001, 10th Floor, Palladium Corporate Road,
Makarba, Ahmedabad-380015. Gujarat, India
+91 (79) 2970 5335 / 6 / 7 | Email:-mail@cedarindia.com | www.durianlam.com

Customer Services



+91 9879604881

WhatsApp